



Time dependent dispersivity behavior of non-reactive solutes in a system of parallel fractures

G. Suresh Kumar, M. Sekhar, D. Misra

► To cite this version:

G. Suresh Kumar, M. Sekhar, D. Misra. Time dependent dispersivity behavior of non-reactive solutes in a system of parallel fractures. *Hydrology and Earth System Sciences Discussions*, 2006, 3 (3), pp.895-923. hal-00298703

HAL Id: hal-00298703

<https://hal.science/hal-00298703>

Submitted on 7 Jun 2006

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Papers published in *Hydrology and Earth System Sciences Discussions* are under open-access review for the journal *Hydrology and Earth System Sciences*

Time dependent dispersivity behavior of non-reactive solutes in a system of parallel fractures

G. Suresh Kumar¹, M. Sekhar², and D. Misra³

¹Department of Civil Engineering, Queens University, Kingston, Canada

²Department of Civil Engineering, Indian Institute of Science, Bangalore, India

³Department of Mining and Geological Engineering, University of Alaska, Fairbanks, USA

Received: 16 March 2006 – Accepted: 24 March 2006 – Published: 7 June 2006

Correspondence to: D. Misra (ffdm1@uaf.edu)

HESSD

3, 895–923, 2006

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

EGU

Abstract

In order to obtain meaningful predictions of contaminant transport, an accurate way of quantifying dispersivity needs to be developed. Results from the theoretical studies suggest that dispersion and the associated dispersivity is non-fickian near the source of contaminant and it grows with travel time and distance. In most tests of a limited duration it is quite probable that the asymptotic regime is not reached, and a proper interpretation of the test should be based on the time-dependent results due to the difficulty associated with the expensive experimental setups added to the marked scarcity of field data. An attempt has been made using spatial moment analysis to evaluate the time dependent dispersivity for a system of parallel fractures with matrix diffusion. The study is limited to non-reactive solutes, having a constant continuous source. An empirical relation to evaluate the dispersivity was developed by us based on the sensitivity analysis, when distinct parallel fractures have constant aperture width and is found to be functions of matrix porosity, matrix diffusion coefficient and injected fracture velocity at pre-asymptotic stage. The system becomes more complex when the aperture widths of the distinct parallel fractures are varied, as it appears that the initial development period of non-fickian behavior may be long due to the continuous lateral mixing of the solute body. It is found that dispersivity at pre-asymptotic regime increases with the coefficient of variation for distinct parallel fractures with varying aperture widths.

1 Introduction

The movement and mixing of solutes in fractured media is of particular interest in an environmental context because of the possibility of very rapid and extensive movement of contaminants through fractures, cracks, or fissures in otherwise low-permeability rock (Gelhar, 1993). Analysis of flow and solute transport in a single fracture provides a basis for understanding contaminant migration in fractured porous media. Such knowledge is required when studying a radioactive waste repository in a rock formation or

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

assessing the characteristics of a fractured aquitard in ground-water remediation or protection work. Dispersivity is established as one of the key uncertain parameters that influence the concentration at accessible-environment compliance points.

5 Generally, measurement of transport properties in a complex geologic media be-
comes a challenging task. Many experimental investigations of solute transport in sin-
gle fractures have been conducted in the laboratory (Sharp, 1970; Iwai, 1976; Grisak
et al., 1980; Moreno et al., 1985; Schrauf and Evans, 1985; Abelin, 1986; Raven
et al., 1988; Rudolph et al., 1991). These investigations have produced measure-
ments of fracture properties and have provided an understanding of the processes
10 controlling solute migration, notably fracture dispersion, matrix diffusion, and chan-
neling. Since, matrix diffusion influences the resultant dispersion along the fracture,
significantly, at the scale of a single fracture, the measurement of dispersivity result-
ing from a fracture-matrix coupled system has become a difficult target. Also since,
dispersivity is a measure of the variability in the fluid velocity affecting the advection of
15 dissolved constituents in ground water (Gelhar et al., 1992), and matrix diffusion is usu-
ally described as the process by which dissolved constituents diffuse into or out of the
primary porosity of the rock-matrix, the resulting spreading of solutes, arising from the
simultaneous influences of both longitudinal dispersion (along the fracture), and matrix
diffusion (across the fracture) is important to performance assessment and must be
20 captured in the transport models. Only the largest heterogeneities are represented ex-
plicitly in the site-scale model; all dispersion caused by smaller-scale features must be
represented through the use of a dispersion model. Numerous groundwater transport
studies have been conducted at a variety of scales, and the results are compiled using
the dispersivity as the correlating parameter. There have been significant studies of
25 heterogeneous field scale media leading to a time-dependent dispersivity (e.g. Gelhar
and Axness, 1983, among others) with the assumption of an infinite domain. The
temporal effects imply that the dispersive flux has cumulative effects of previous times,
which is typical for a non-Fickian model (Scheidegger, 1960).

Earlier studies pertaining to the evaluation of dispersivity in a fractured media does

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

not include the coupling effect between fracture and matrix. For example, Horne and Rodriguez (1983) used a method similar to Taylor and Geoffrey (1953) to derive an expression for the net longitudinal dispersivity, for flow in a fracture. It is to be noted that the dispersivity was related as a function of fracture aperture, flow velocity and molecular diffusion, while the influence of the rock matrix was not considered (Gilardi, 1984). McKay et al. (1993) had to choose the values of dispersivity for a limited range between 0.2–1.2 m. In general, for single-phase flow, the dispersivity of a fracture is deduced from the statistics of the aperture distribution, using stochastic theory (Keller, 1997). Thus, no attention has been provided to the dispersivity behavior resulting from the coupled effect of fracture and rock matrix.

Analytical solutions have been developed for solute transport through an idealized fracture in a homogeneous porous matrix by reducing the transport equation in a two-dimensional domain to two coupled one-dimensional problems (Tang et al., 1981; Grisak and Pickens, 1980). Neretnieks et al. (1982) derived a solution assuming negligible dispersion in the fracture. This effect was added in the solution of Tang et al. (1981), which is widely used for model comparison.

The matrix diffusion concept of transport of fractured geologic media has been the basis of numerous mathematical models. The most widely used model involves advective and dispersive transport in the fracture coupled with diffusive transport into the porous matrix (Tang et al., 1981; Maloszewski and Zuber, 1985; Moench, 1995). This model and its successors have been used successfully to fit a number of field tracer tests in fractured rock (e.g., Maloszewski and Zuber, 1993; Moench, 1995). In fact these models have achieved such acceptance that it has been suggested that an extended breakthrough tail indicates that matrix diffusion has influenced transport (Tsang, 1995; Meigs et al., 1997). The model of Tang et al. (1981) was later extended to a system of parallel fractures. To mention a few, Grisak and Pickens (1980), Kennedy and Lennox (1995), Jardine et al. (1999), Hara et al. (2000), Becker and Shapiro (2000), Callahan et al. (2000) have used the conceptual model developed by Sudicky and Frind (1982) and Tang et al. (1981) for the purpose of their model development and validation of

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

their model outcomes.

There are several mechanisms giving dispersion or spreading of a concentration pulse injected into a fractured porous system: (1) molecular diffusion in the fluid, (2) velocity variations in the fluid within individual fracture (microscopic dispersion), (3) velocity variations between different fractures (macroscopic dispersion), and (4) chemical and physical interactions with the associated solid matrix (Rasmuson, 1985). In the present paper we concentrate on the dispersivity behavior caused by the macroscopic dispersion and the physical interaction with the solid matrix as it is one of the less understood physical parameters in the modeling of contaminant transport. The study of this parameter has been the subject of considerable research over the past several years (Gelhar, 1993; Woodbury, 1997; Stafford et al., 1998). The difficulty associated with these studies had been the high cost of conducting the required experimental tests and the marked scarcity of the field data (Al-Suwaiyan, 1998). Also, in most experiments of a limited duration it is quite probable that the asymptotic regime is not reached, and a proper interpretation of the test should be based on the time-dependent results (Neretnieks et al., 1982; Moreno et al., 1985; Dagan, 1988).

Moment analysis is a very useful technique used to understand the heterogeneous system of transport in fracture-matrix systems or porous media better. Instead of solving for the actual concentration along the fracture, the original governing equations are modified to solve for simplified, but physically important, global quantity referred to as the spatial moments (Goltz and Roberts, 1987; Valocchi, 1989). This global variable can eventually be combined to study the overall impact of different processes on the evolution of pollutant plume (spatial moments). In this paper, we shall investigate the time dependent behavior of effective values of dispersivity by the method of spatial moments and its behavior is studied at pre-asymptotic stage.

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

2 Physical system and governing equations

The complex network of fractures consisting of both primary and secondary fractures is illustrated in Fig. 1. The primary fractures are assumed to have parallel smooth walls. Two cases are analyzed one with a system of distinct parallel fractures having constant aperture width while the other having different aperture widths. The migration of the dissolved contaminant plumes in a system of distinct parallel fractures is modeled by coupled partial differential equations, one describing the transport along the fracture while the other describing the transport into the porous matrix (Sudicky and Frind, 1982). The system of equations for a constant continuous source along with the boundary conditions is as follows.

The equation for the fracture is given by

$$\frac{\partial c_f}{\partial t} = -v_f \frac{\partial c_f}{\partial x} + D_L \frac{\partial^2 c_f}{\partial x^2} - \frac{q}{b} \quad (1)$$

The equation for the matrix is given by

$$\frac{\partial c_m}{\partial t} = D_m \frac{\partial^2 c_m}{\partial y^2} \quad (2)$$

where, $q = -\theta D_m \frac{\partial c_m}{\partial y}$ and $D_L = \alpha_L v + D_m$.

Here c_f and c_m are the concentrations of solute in fracture and matrix respectively (M/L^3), v_f is the ground water velocity in the fracture (L/T), $2b$ is the fracture aperture (L), D_L is the hydrodynamic dispersion coefficient (L^2/T), D_m is the molecular diffusion coefficient (L^2/T), and q is the diffusive flux (source/sink) perpendicular to the fracture axis ($M/L^2 T^{-1}$).

The initial and boundary conditions for the fracture and matrix system, respectively, are:

$$c_f(x, 0) = 0; c_f(0, t) = c_0; c_f(L_f, t) = 0 \quad (3)$$

HESSD

3, 895–923, 2006

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

EGU

$$c_m(x, y, 0) = 0; c_m(x, b, t) = c_f(x, t); \left. \frac{\partial c_m}{\partial y} \right|_{(x, L_m, t)} \quad (4)$$

where L_f is the length of the fracture and L_m is the half fracture spacing (perpendicular to the fracture axis).

The first spatial moment characterizing the displacement of the center of mass and the second spatial moment characterizing the spread around the center of mass of the solute are obtained from the concentration distribution in fracture using an approach described by Guven et al. (1984). These expressions are valid for concentration pulse sources. Since a constant continuous source is used as a boundary condition at the inlet of the fracture in the present study, a first derivative of the concentration in the fracture is used to obtain an equivalent pulse in order to use these expressions. The study is limited to non-reactive solutes.

By using the governing equations referred in the appendices, which permit determination of spatial moments based on the mean and standard deviation, it is possible to assess how effective parameters behave with respect to the solute transport parameters. In particular, an effective velocity, an effective dispersion coefficient and an effective dispersivity will be computed in terms of model parameters. These effective parameters are local equilibrium model equivalents, which approximately duplicate the concentration responses of the physical non-equilibrium model. The effective parameters are parameters, which would be inferred from applying the local equilibrium transport model to an observed spatial concentration distribution (Goltz and Robertz, 1987). Use of these effective parameters will aid in understanding how the general behavior of the spatial concentration distributions differ.

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

3 Behavior of mobile spatial distributions

3.1 Parallel multiple fractures with constant apertures

Figures 2–7 show how dispersivity behaves as a function of time, in a system of constant discrete multiple-parallel fractures, for local fracture dispersivity, half fracture spacing, fracture velocity, matrix diffusion coefficient and matrix porosity, respectively. The range of solute transport parameters was chosen that ensures the asymptotic region and the data set are provided in Table 1. Laboratory data of Neretniek’s et al. (1982) and Moreno et al. (1985) provide the approximate choice of the system parameters, taken for sensitivity analyses. Figure 2 illustrates the time rate of change of effective dispersivity, for various local fracture dispersivities. In a homogeneous porous system with a conservative solute, the value of dispersivity will be a constant equal to the local dispersivity. But the physically non-equilibrium fracture-matrix system shows an order of increase of dispersivity from the local fracture dispersivity with time, before it reaches a constant asymptotic value. Initially, all the mass is associated with mobile fluids in the fracture region. With time, more and more solute diffuses into the immobile fluids in the porous matrix region, so that eventually, the lateral mixing in the fracture is increased considerably, indicated by the increasing effective dispersivity region at pre-asymptotic stage. It is observed that local fracture dispersivities are insensitive to the choice of the parameters taken. It is observed that the time needed to achieve the asymptotic dispersivity in all cases is nearly the same. It is also noted that the increase in effective dispersivity during the pre-asymptotic regime is not marginal and is nearly two orders of magnitude larger than the local fracture dispersivity considered.

Figure 3 shows the temporal variation of effective dispersivity for various half-fracture spacing. It is interesting to note that all the profiles have similar slopes at pre-asymptotic stage due to the same diffusive transport path into the immobile region from fracture, irrespective of the length of the half fracture spacing considered. The profiles deviate at large times, corresponding to the increase in the half fracture spacing. It is important to realize that the simulated profiles take larger time to reach the

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

asymptotic region for larger half fracture spacing, as more time is needed to build up the mass from the mobile phase fracture region into the immobile phase matrix region.

Figure 4 shows the temporal variation of effective dispersivity for various injected water velocities in the fracture. It is observed that all the profiles have distinct slopes at pre-asymptotic stage because the solute migration distance along the mobile region differs considerably with the injected water velocity in the fracture. It is important to realize that the extent of mixing of solutes between fracture and matrix is directly proportional to the injected water velocity, as mixing in the fracture is determined by the initial solute mass. Since, it is not possible to predict the residence time of solutes in the fracture, before the start of the experiment, the value of effective dispersivity needs to be evaluated, which is independent of residence time of solutes in the fracture, and in turn, the water velocity. Figure 5 shows the time rate of change of effective dispersivity normalized by the injected water velocity. This removes the impact of water velocity. Such analysis assists to evaluate the effective dispersivity given the matrix parameters alone and does not require the value of water velocity and the associated residence time in the fracture.

Figures 6 and 7 show the effect of effective matrix diffusion coefficient and matrix porosity on dispersivity. It is to be noted that the slope of the dispersivity profiles are sensitive from the start of the numerical experiment. Matrix porosity and matrix diffusion coefficient have dampening effect on solute spread as they reduce the mass retention time along the fracture. It is to be noted that the time required to reach the asymptoticity is larger under low matrix porosity and matrix diffusion coefficient. A smaller value of such mass transfer coefficients implies a weak coupling between fracture and matrix, and leads to a larger solute mixing.

In order to obtain an empirical relation between the effective dispersivity and other solute transport parameters of the fracture-matrix coupled system, numerical simulations are carried out for various sets of parameters and care is taken to ensure that the solutes reach an asymptotic value of dispersivity in all cases. Having obtained the dispersivity profiles, the behavior of effective dispersivity is analyzed during its pre-

**Dispersivity behavior
of non-reactive
solute in fractures**

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

asymptotic regime, i.e., before reaching the constant value of dispersivity. Thus, the magnitude of the time dependent effective dispersivity at an early time, before reaching a constant value is arrived from these plots and the corresponding expression is obtained as,

$$\frac{\alpha(t)}{V_o} = t^{[\theta^{-0.3} \times (D_m^{-0.143} \times 0.037)]} \times c \quad (5)$$

where $\alpha(t)$ is the early time dispersivity, V_o is the injected fracture velocity and c varies from 0.1–0.3. The analysis is extended to compute the time required to attain the asymptotic value and the setting time of the asymptotic dispersivity is given by

$$t_{\infty} = \frac{5 \times 10^{-6}}{D_m} [c_1 L_m - c_2] \quad (6)$$

where $c_1 = -8546\theta + 5886$ and $c_2 = 46$. It is observed that the time needed to reach the asymptotic dispersivity depends strongly on the length of the fracture spacing (L_m) and the matrix diffusion coefficient (D_m).

3.2 Parallel multiple fractures with varying apertures

Figure 8 presents the temporal variation of first spatial moment for various coefficients of variation of the fracture aperture described by the ratio of the standard deviation of the fracture aperture to the mean fracture aperture. The system parameters used for these simulations are obtained from Neretniek's et al. (1982) given in Table 2. It is observed from this plot that the early time behavior of the first spatial moment is linear with time similar to the one observed for a conservative solute in a homogeneous porous medium. It is also observed that increasing the coefficient of variation, results in larger displacements. This is expected as higher coefficient of variation result in decreased loss in mass flux from the fracture into the porous matrix.

A plot of the temporal evolution of the spatial second moment of the solute is presented in Fig. 9. It is observed that the second spatial moment increases nonlinearly

with time for various coefficients of variation. Before linear behavior is attained, the variance plot is concave, indicating that the macro-dispersion of the solute increases with time. This corresponds to an additional dispersion produced during this period due to solute diffusion into matrix. The linear behavior is attained with lesser displacement along the fracture, when the coefficient of variation is zero.

The variation of effective dispersivity with time and solute migration distance are presented in Figs. 10 and 11, respectively. It is observed from the figures that the effective dispersivity has a linear relationship with both space and time at pre-asymptotic stage. It is interesting to note that the effective dispersivity increases as coefficient of variation increases. An attempt has been made to validate the numerical results of the present work with the available data. For this purpose, the numerically simulated dispersivity values have been compared with the laboratory data of Neretnieks et al. (1982) and Moreno et al. (1984). The respective plots are shown in Figs. 11 and 12. It is clear from the plots that the projected model outcomes during the pre-asymptotic dispersivity reasonably match with the laboratory data.

4 Conclusion

A numerical model is developed to describe the solute transport in a single fracture with matrix diffusion. The spatial moment analysis of solute front dispersivity in the fracture for transport of non-reactive solutes is presented during pre-asymptotic regime. It is observed that the solute front dispersivity increases with fracture spacing and water velocity, while it decreases with matrix porosity and matrix diffusion coefficient. Results also suggest that the effective dispersivity remains independent of local fracture dispersivity. The expression for pre-asymptotic dispersivity for the case of non-reactive solutes is also provided. The effect of coefficient of variation of aperture widths of the parallel channels on the solute front dispersivity is analyzed through numerical modeling. The results confirm that the higher coefficient of variation, representing a large variation in thicknesses, in a system of parallel fractures, serves to increase the mixing

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

of solutes. This study thus has demonstrated the applicability of a simple system of parallel fractures with matrix diffusion to estimate the effective dispersivity in a fractured, dual porosity media. It is apparent that analyzing mean properties for a system of parallel fractures leads to reasonably good fit with the laboratory data (Figs. 12 and 13).

References

Abelin, H.: Migration in a single fracture: An in situ experiment in a natural fracture, Ph.-D. thesis, Dep. Of Chem. Eng., R. Inst. Of Technol., Stockholm, 1986.

AlSuwaiyan, S. M.: Nondeterministic Evaluation of Field Scale-Dispersivity Relation, J. Hydrologic Engg, 3(3), 215–217, 1998.

Becker., M. W. and Shapiro, A. M.: Tracer transport in factured crystallinerock: Evidence of nondiffusive breakthrough tailing, Water Resour. Res., 36(7), 1677–1686, 2000.

Callahan., T. C., Reimus, P. W., Bowman, R. S., and Haga, M. J.: Using multiple experimental methods to determine fracture/matrix interactions and dispersion of nonreactive solutes in saturated volcanic tuff, Water Resour. Res., 36(12), 3547–3585, 2000.

Dagan, G.: Time-dependent macrodispersion for solute transport in anisotropic heterogeneous aquifers, Water Resour. Res., 24(9), 1491–1500, 1988.

Gelhar, L. W., Welty, C., and Rehfeldt, K. R.: A critical review of data on field scale dispersion in aquifers, Water Resour. Res., 28(7), 1955–1974, 1992.

Gelhar, L. W. and C. L.: Axness Three-dimensional stochastic analysis of macrodispersion in aquifers, Water Resour. Res., 19(1), 161–180, 1983.

Gelhar, L. W.: Stochastic Subsurface Hydrology, Prentice-Hall, Englewood Cliffs, N. J., 390 pp, 1993.

Gilardi, J. R.: Experimental determination of the effective Taylor dispersivity in a fracture, Dissertation of Master of Science, Department of Petroleum Engineering, Stanford University, 1984.

Goltz, M. N. and Roberts, P. V.: Using the method of moments to analyse three-dimensional diffusion-limited Solute transport from temporal and spatial perspectives, Water Resour. Res., 23(8), 1575–1585, 1987.

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

AbstractIntroduction

ConclusionsReferences

TablesFigures

◀▶

◀▶

BackClose

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Grisak, G. E. and Pickens, J. F.: Solute transport through fractured media, 1, The effect of matrix diffusion, *Water Resour. Res.*, 16(4), 719–730, 1980.
- Grisak, G. E., Pickens, J. F., and Cherry, J. A.: Solute Transport through Fractured Media: 2. Column Study on Fractured Till, *Water Resour. Res.*, 16, 731–739, 1980.
- 5 Guven, O., Molz, F. J., and Melville, J. G.: An Analysis of Dispersion in a Stratified Aquifer, *Water Resour. Res.*, 20(10), 1337–1354, 1984.
- Hara., S. K. O., Parker, B. L., Jorgensen, P. R., and Cherry, J. A.: Trichloroethane DNAPL flow and mass distribution in naturally fractured clay: Evidence of aperture variability, *Water Resour. Res.*, 36(1), 135–147, 2000.
- 10 Horne, R. N. and Rodriguez, F.: Dispersion in Tracer Flow in Fractured Geothermal Systems, *Geophys. Res. Lett.*, 10(4), 289–292, 1983.
- Iwai, K.: Fundamental studies of fluid flow through a single fracture, Ph.D. dissertation, Univ. of Calif., Berkeley, 1976.
- Jardine., P. M., Sanford, W. E., Gwo, J. P., Reedy, O. C., Hicks, D. S., Riggs, J. S., and Bailey, W. B.: Quantifying diffusive mass transfer in fractured shale bedrock, *Water Resour. Res.*, 35(7), 2015–2030, 1999.
- 15 Keller, A. A.: High resolution CAT imaging of fractures in consolidated materials, *Int. J. Rock. Mech. Min. Sci.*, 34(3/4), 358–375, 1997.
- Kennedy, C. A. and Lennox, W. C.: Control volume model of solute transport in a single fracture, *Water Resour. Res.*, 31(2), 313–322, 1995.
- 20 Maloszewski, P. and Zuber, A.: On the theory of tracer experiments in fissured rocks with a porous matrix, *J. Hydrol.*, 79, 333–358, 1985.
- Maloszewski, P. and Zuber, A.: Tracer experiments in fissured rocks: matrix diffusion and the validity of models, *Water Resour. Res.*, 29(8), 2723–2735, 1993.
- 25 McKay, L. D., Gillham, R. W., and Cherry, J. A.: Field experiments in a fractured clay till 2. Solute and colloid transport, *Water Resour. Res.*, 29(12), 3879–3890, 1993.
- Meigs, L. C., Beauheim, R. L., McCord, J. T., Tsang, Y. W., Haggerty, R.: Design, modelling, and current interpretations of the H-19 and H-11 tracer tests at the WIPP site, in: *OECD Proceedings – Disposal of radioactive waste, Field tracer experiments: Role in the prediction of radionuclide migration, Synthesis and proceedings of an NEA/EC GEOTRAP Workshop, Cologne, Germany, 28–30 August 1996, OECD/NEA, Paris, France, 1997.*
- 30 Moench, A. F.: Convergent radial dispersion in a double-porosity aquifer with fracture skin: analytical solution and application to a field experiment in fractured chalk, *Water Resour.*

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Res., 31(8), 1823–1835, 1995.
- Moreno, L., Neretnieks, I., and Eriksen, T.: Analysis of some laboratory tracer runs in natural fissures, *Water Resour. Res.*, 21(7), 951–958, 1985.
- Neretnieks, I., Eriksen, T., and Tahtinen, P.: Tracer Movement in a Single Fissure in Granitic Rock: Some Experimental Results and Their Interpretation, *Water Resour. Res.*, 18(4), 849–858, 1982.
- Rasmuson, A.: Analysis of Hydrodynamic Dispersion in Discrete Fracture Networks Using the Method of Moments, *Water Resour. Res.*, 21(11), 1677–1683, 1985.
- Raven, K. G., Novakowski, K. S., and Lapcevic, P. A.: Interpretation of field tracer tests of a single fracture using a transient solute storage model, *Water Resour. Res.*, 24(12), 2019–2032, 1988.
- Rudolph, D. L., Cherry, J. A., and Farvolden, R. N.: Groundwater flow and solute transport in fractured lacustrine clay near Mexico city, *Water Resour. Res.*, 27(9), 2187–2201, 1991.
- Scheidegger, A. E.: The physics of flow through porous media, The Macmillan Company, New York, 1960.
- Schrauf, T. W. and Evans, D. D.: Laboratory studies of gas flow through a single natural fracture, *Water Resour. Res.*, 22(7), 1038–1050, 1986.
- Sharp, J. C.: Fluid flow through fissured media, Ph.-D. dissertation, Imp. College, London, 1970.
- Sudicky, E. A. and Frind, E. O.: Contaminant Transport in Fractured Porous Media: Analytical Solutions for a System of Parallel Fractures, *Water Resour. Res.*, 18(6), 1634–1642, 1982.
- Stafford, P., Toran, L., and McKey, L.: Influence of fracture truncation on dispersion: A dual permeability model, *J. Cont. Hydrol.*, 30, 79–100, 1998.
- Tsang, Y. W.: Study of alternative tracer tests in characterizing transport in fractured rocks, *Geophys. Res. Lett.*, 22(11), 1421–1424, 1995.
- Tang, D. H., Frind, E. O., and Sudicky, E. A.: Contaminant transport in fractured porous media: Analytical solution for a single fracture, *Water Resour. Res.*, 17(3), 467–480, 1981.
- Taylor, Sir G. F. R. S.: Dispersion of Soluble Matter Flowing Slowly Through a Tube, *Proc. Roy. Soc. , A* 219, 186–203, 1953.
- Valocchi, A.: Spatial moment analysis of the transport of kinetically absorbing solutes through stratified aquifers, *Water Resour. Res.*, 25(2), 273–279, 1989.
- Woodbury, A. D.: A probabilistic fracture transport model: Application to contaminant transport in a fractured clay deposit, *Canadian Geotechnical Journal*, 34, 784–798, 1997.

HESSD

3, 895–923, 2006

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

EGU

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Table 1. Test parameters for Fig. 2.

Figure	2b (μm)	2L (m)	V_f (m/d)	α_L (m)	θ_m	D_m (m^2/d)
2	100	0.02	1.0	0.025–0.1	0.1	5×10^{-7}
3	100	0.01–0.075	0.5	0.05	0.1	5×10^{-6}
4	100	0.02	0.5–1.0	0.1	0.1	1×10^{-6}
5	100	0.02	0.5–1.0	0.1	0.1	1×10^{-6}
6	100	0.02	0.5	0.05	0.05	5×10^{-7} – 7.5×10^{-6}
7	100	0.05	0.5	0.05	0.01–0.1	5×10^{-6}

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

Table 2. The parameters obtained from the data of Neretniek et al. (1982) and Moreno et al. (1985) for Figs. 11–13.

Index	Data of Neretniek et al. (1982)	Data of Moreno et al. (1985)
Mean Aperture (2b)	0.182 mm	0.14 and 0.15 mm
Mean Dispersivity (α_o)	0.027 mm	0.005 and 0.011 mm
Mean Velocity (V_o)	3.65 m/day	5.0 m/day
Diffusion Coefficient (D_m)	$8.64\text{e-}07 \text{ m}^2/\text{day}$	$8.64\text{e-}08 \text{ m}^2/\text{day}$
Matrix Porosity (θ_m)	0.01	0.01
Fracture Spacing (2L)	0.01 m	0.01 m

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

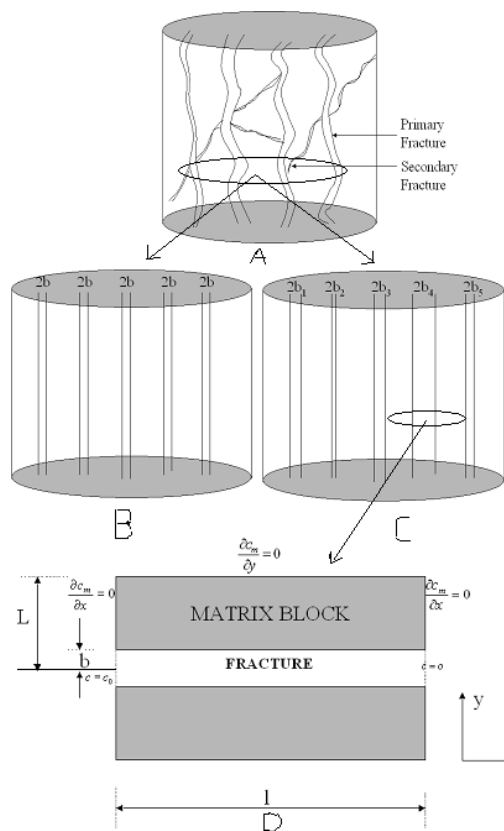


Fig. 1. A fracture-matrix system. **(a)** Conceptualization of a system of smooth parallel multiple fractures having constant aperture widths. **(b)** Conceptualization of a system of smooth parallel multiple fractures having variable aperture widths. **(c)** A single fracture-matrix with the boundary conditions posed for the solute transport model.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

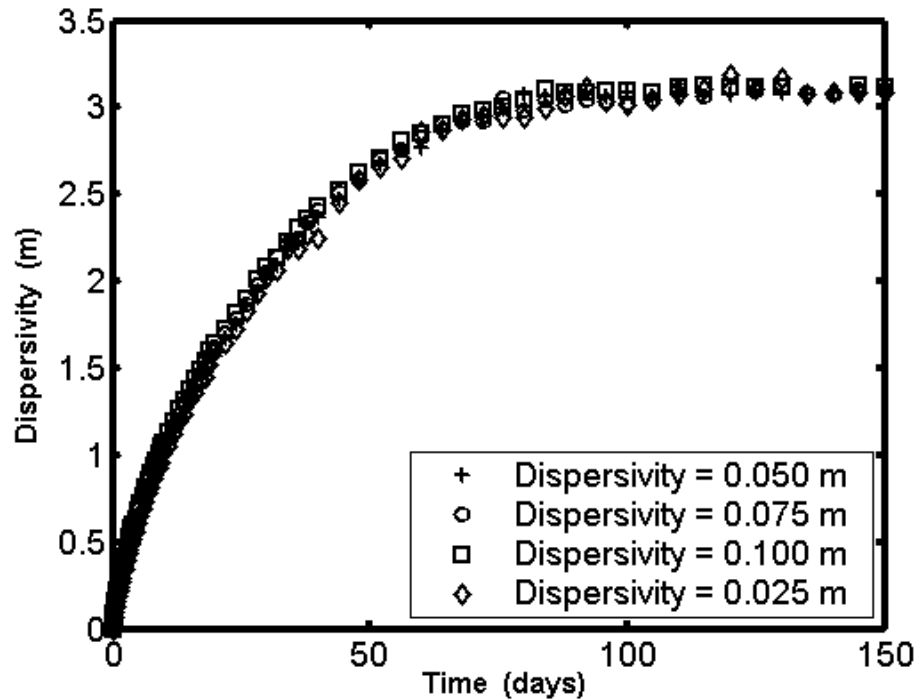


Fig. 2. Temporal variation of dispersivity with $2b=100\ \mu\text{m}$; $2L=0.02\ \text{m}$; $V_f=1.0\ \text{m/d}$; $\theta_m=0.1$; $D_m=5.0\text{e}-07\ \text{m}^2/\text{d}$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

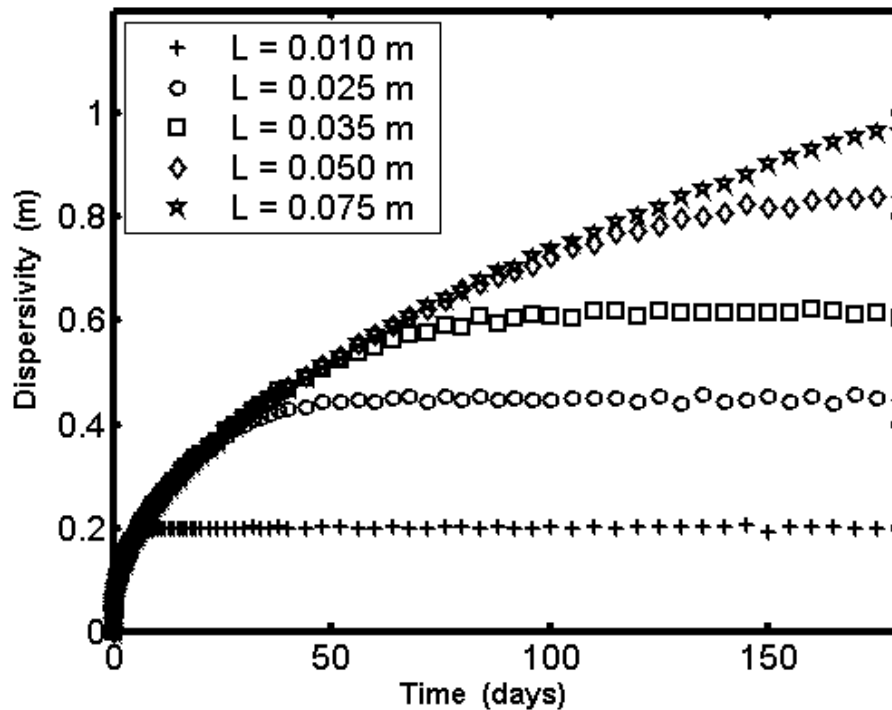


Fig. 3. Temporal variation of dispersivity with $2b=100\text{ }\mu\text{m}$; $V_f=0.5\text{ m/d}$; $\alpha_L=0.05\text{ m}$; $\theta_m=0.1$; $D_m=5.0\text{e}-06\text{ m}^2/\text{d}$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

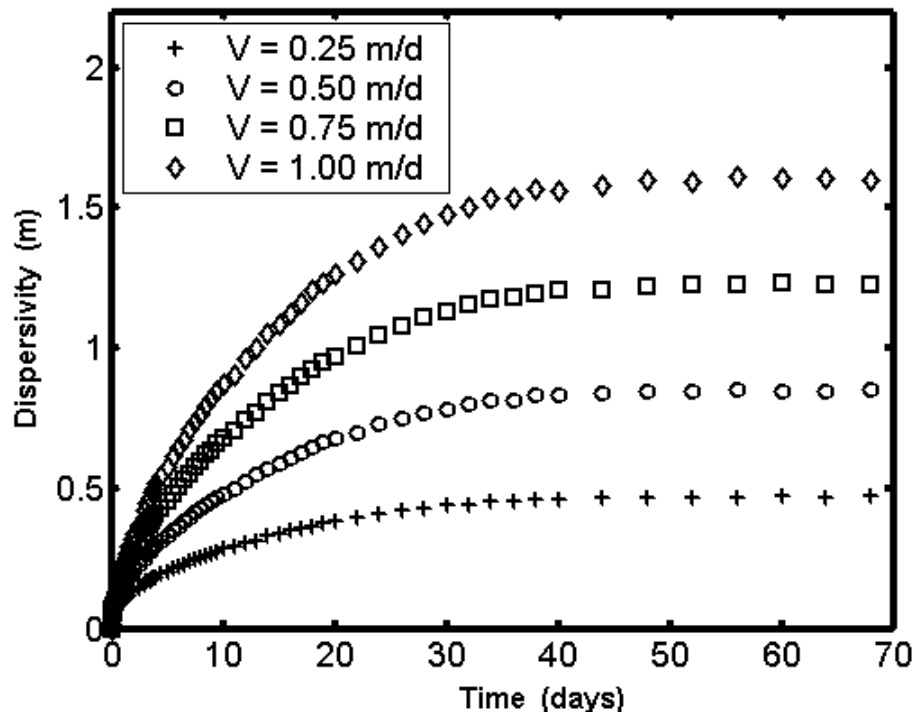


Fig. 4. Temporal variation of dispersivity with $2b=100\ \mu\text{m}$; $2L=0.02\ \text{m}$; $\alpha_L=0.05\ \text{m}$; $\theta_m=0.1$; $D_m=1.0\text{e}-06\ \text{m}^2/\text{d}$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Dispersivity behavior
of non-reactive
solutes in fractures

G. Suresh Kumar et al.

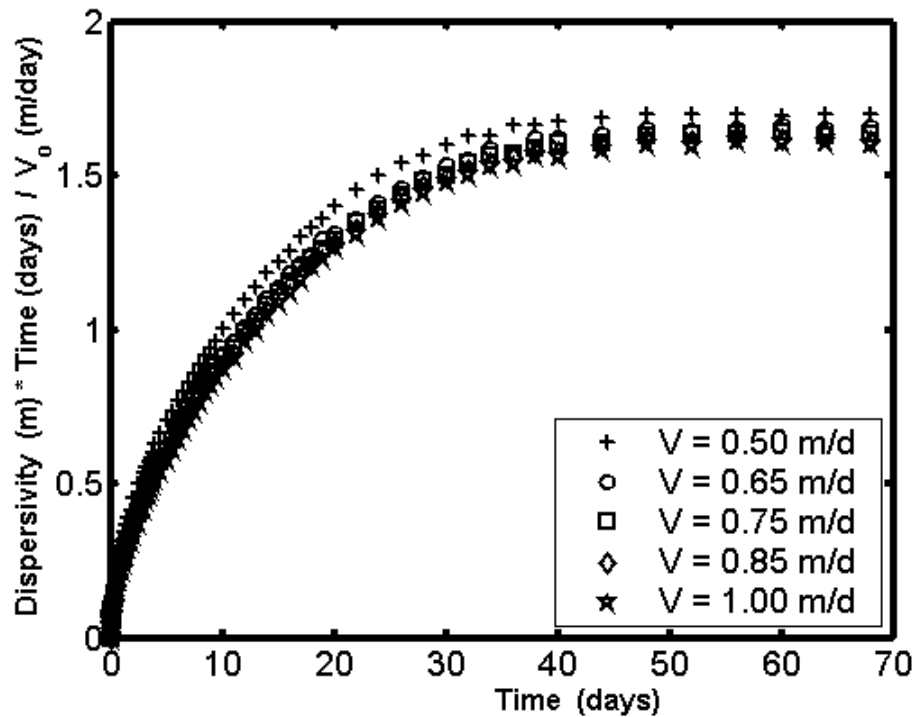


Fig. 5. Temporal variation of dispersivity with $2b=100\ \mu\text{m}$; $2L=0.02\ \text{m}$; $\alpha_L=0.05\ \text{m}$; $\theta_m=0.1$; $D_m=1.0\text{e-}06\ \text{m}^2/\text{d}$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

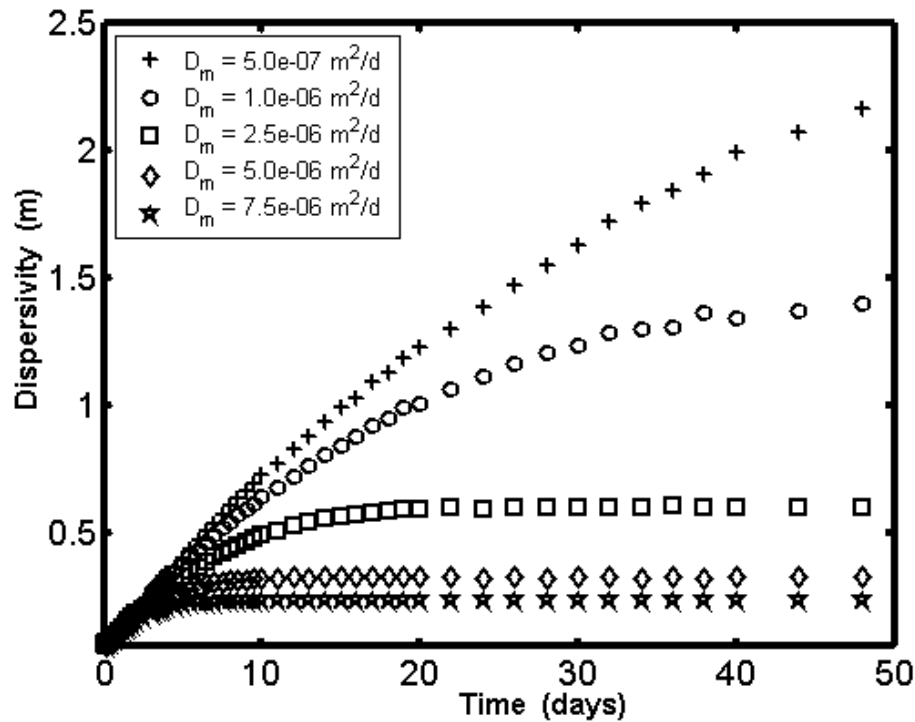


Fig. 6. Temporal variation of dispersivity with $2b=100\ \mu\text{m}$; $2L=0.02\ \text{m}$; $V_f=0.5\ \text{m}$; $\alpha_L=0.05\ \text{m}$; $\theta_m=0.05$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

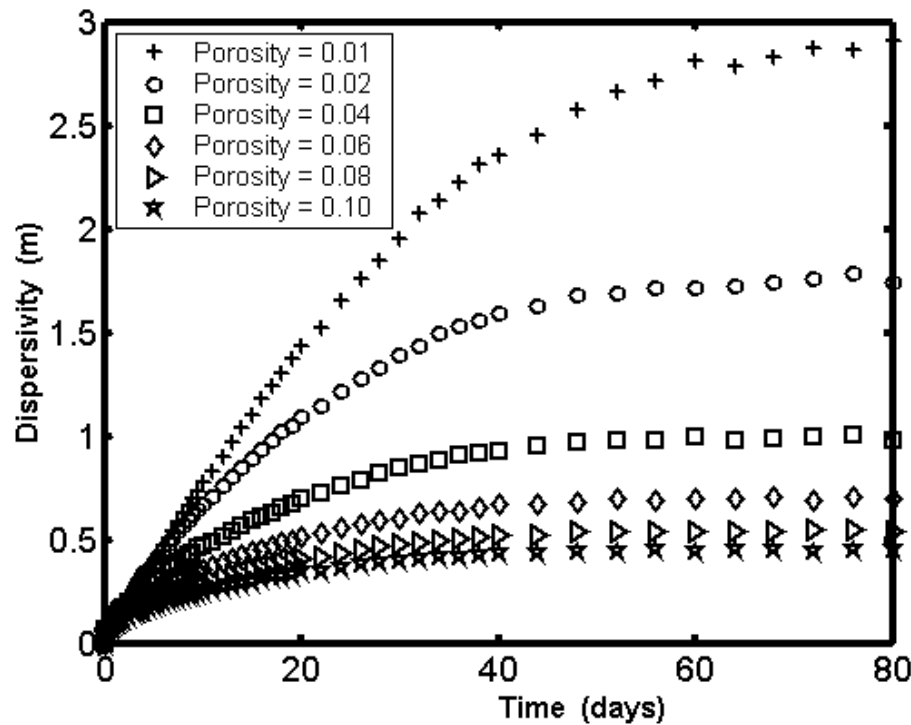


Fig. 7. Temporal variation of dispersivity with $2b=100\text{ }\mu\text{m}$; $2L=0.05\text{ m}$; $V_f=0.5\text{ m}$; $\alpha_L=0.05\text{ m}$; $D_m=5.0\text{e-}06\text{ m}^2/\text{d}$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

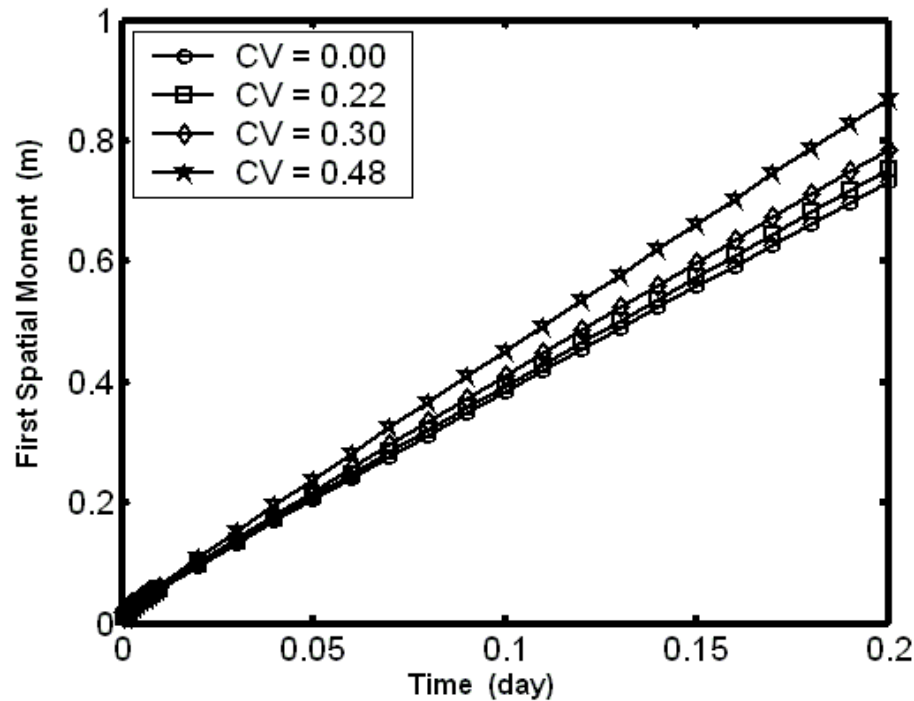


Fig. 8. Temporal variation of first spatial moment for various coefficient of variation for the data set presented in Table 2.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

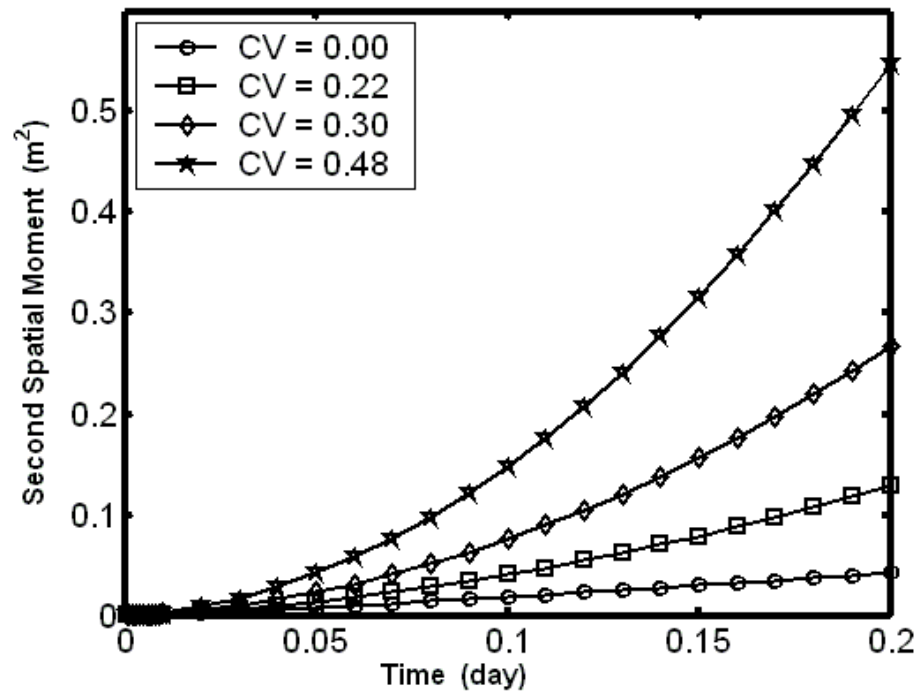


Fig. 9. Temporal variation of second spatial moment for various coefficient of variation for the data set presented in Table 2.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

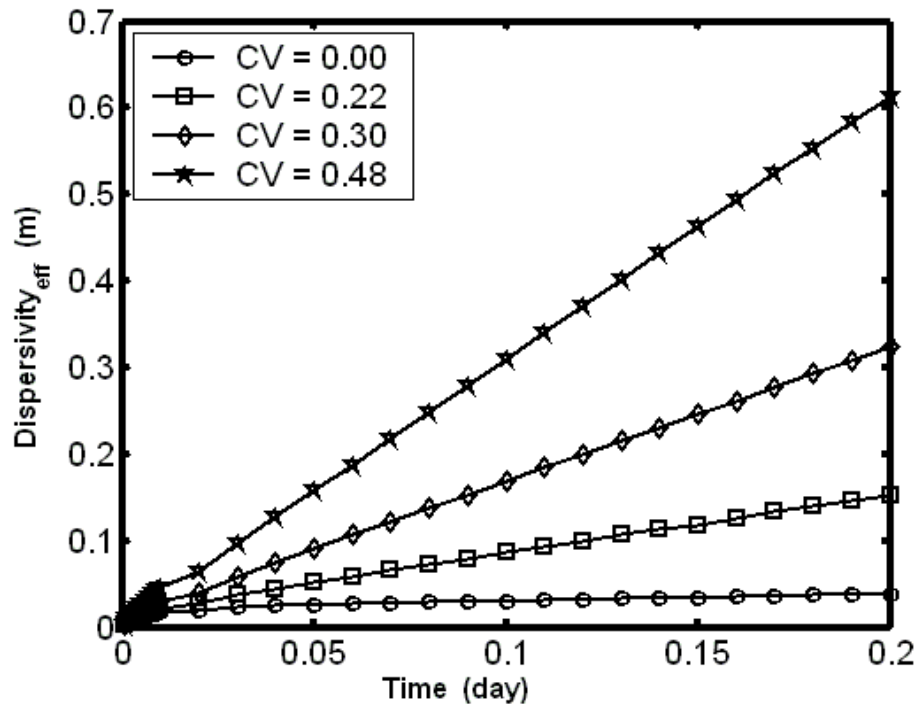


Fig. 10. Temporal variation of effective dispersivity for various coefficient of variation for the data set presented in Table 2.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Dispersivity behavior
of non-reactive
solutes in fractures**

G. Suresh Kumar et al.

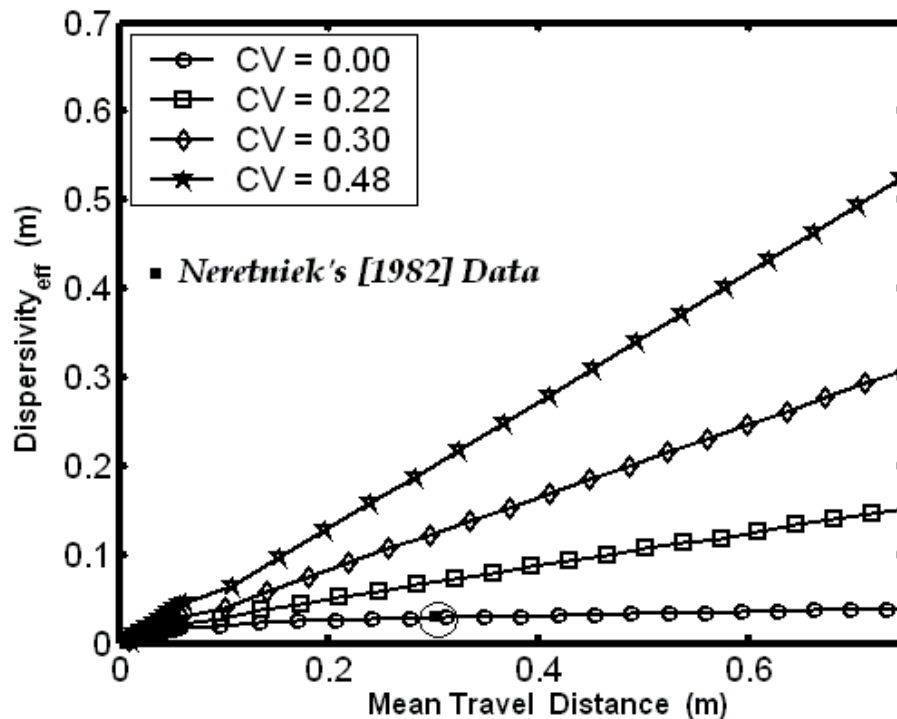


Fig. 11. A comparison of effective dispersivity simulated by the present model and Neretniek et al. (1982) data.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

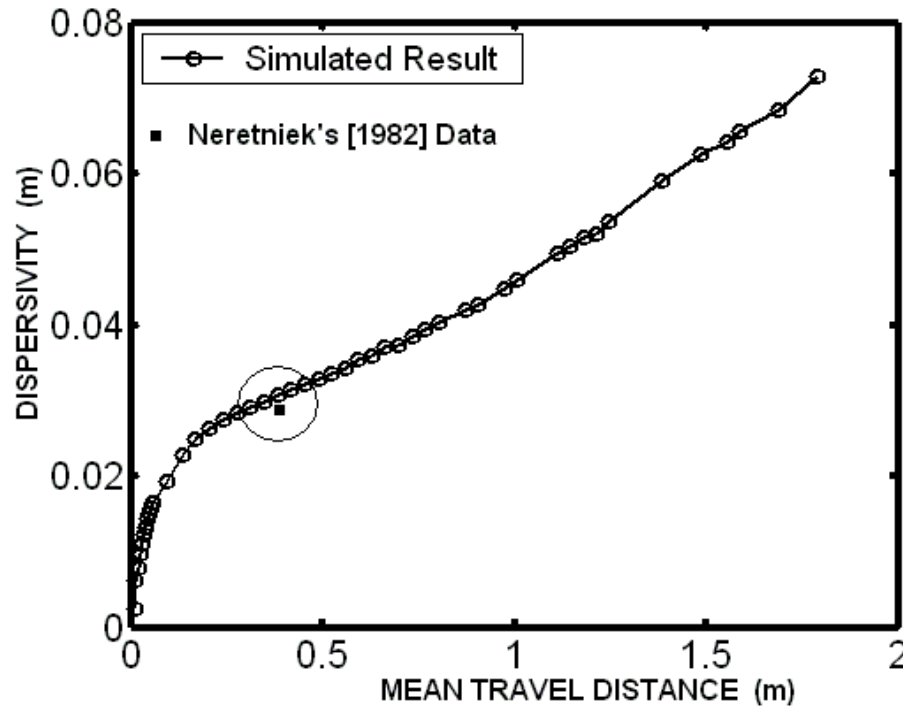


Fig. 12. A comparison of effective dispersivity simulated by the present model and Neretniek et al. (1982) data: a larger scale.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Dispersivity behavior of non-reactive solutes in fractures

G. Suresh Kumar et al.

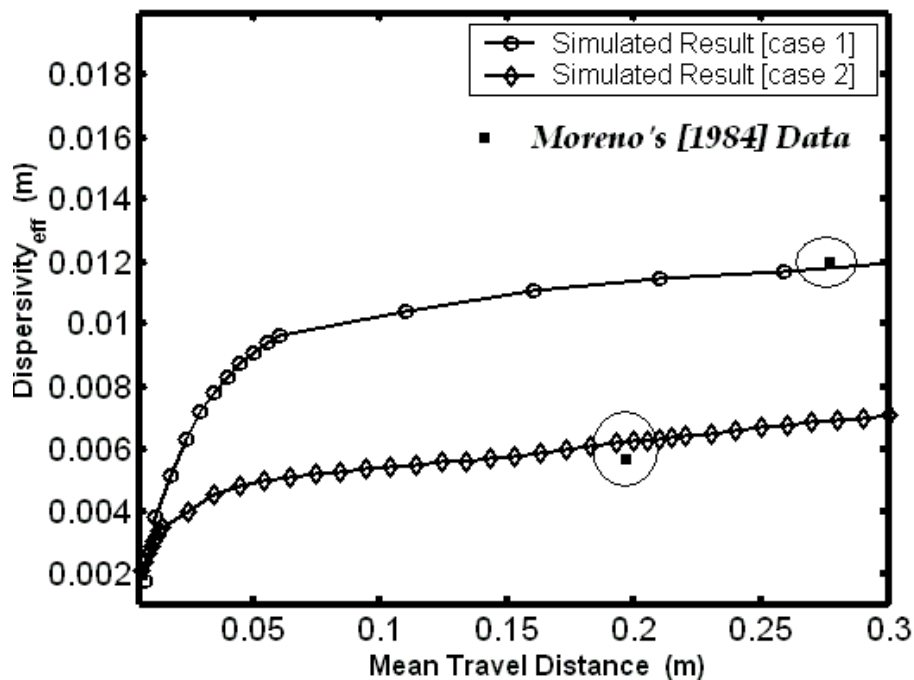


Fig. 13. A comparison of effective dispersivity simulated by the present model and Moreno et al. (1985) data.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)